

UTILITY PATENT APPLICATION TRANSMITTAL

Submit an original and a duplicate for fee processing
(Only for new nonprovisional applications under 37 CFR §1.53(b))

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Attorney Docket No. 400929

First Named Inventor Takayuki MIMURA

APPLICATION ELEMENTS

1. ☒ Transmittal Form ☒ with Fee
2. ☒ Specification (including claims and abstract) [Total Pages 30]
3. ☒ Drawings [Total Sheets 9]
4. ☒ Combined Declaration and Power of Attorney [Total Pages 3]
 - a. ☒ Newly executed
 - b. ☐ Copy from prior application
 - i. ☐ Deletion of Inventor(s) Signed statement attached deleting inventor(s) named in the prior application
5. ☐ Incorporation by Reference: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy
 - c. ☐ Statement verifying above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet and document(s))
9. ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)
 - ☒ Form PTO-1449
 - ☒ Copies of References
12. ☒ Preliminary Amendment
13. ☒ Return Receipt Postcard (Should be specifically itemized)
14. ☐ Small Entity Statement(s)
 - ☐ Enclosed
 - ☐ Statement filed in prior application; status still proper and desired
15. ☒ Certified Copy of Priority Document(s)
16. ☒ PrintEFS printout
17. ☐ Other:

18. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information in (a) and (b) below:
- (a) ☐ Continuation ☐ Divisional ☐ Continuation-in-part of prior application Serial No. _____
Prior application information: Examiner _____; Art Unit: _____
- (b) Preliminary Amendment: Relate Back - 35 USC §120. The Commissioner is requested to amend the specification by inserting the following sentence before the first line:
"This is a ☐ continuation ☐ divisional of copending application(s)
☐ Application No. _____, filed on _____
☐ International Application _____, filed on _____, and which designates the U.S."

APPLICATION FEES

APPLICATION FEES					
BASIC FEE					\$710.00
CLAIMS		NUMBER FILED		NUMBER EXTRA	RATE
Total Claims	10	-20=	0	x \$18.00	\$0.00
Independent Claims	2	- 3=	0	x \$80.00	\$0.00
<input type="checkbox"/> Multiple Dependent Claims(s) if applicable					+\$270.00
Total of above calculations =					\$710.00
Reduction by 50% for filing by small entity =					\$()
<input checked="" type="checkbox"/> Assignment fee if applicable					+\$40.00
TOTAL =					\$750.00

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 400929

19. ☐ Please charge my Deposit Account No. 12-1216 in the amount of \$
20. ☒ A check in the amount of \$750.00 is enclosed.
21. The Commissioner is hereby authorized to credit overpayments or charge any additional fees of the following types to Deposit Account No. 12-1216:
- a. ☒ Fees required under 37 CFR §1.16.
- b. ☐ Fees required under 37 CFR §1.17.
22. ☐ The Commissioner is hereby generally authorized under 37 CFR §1.136(a)(3) to treat any future reply in this or any related application filed pursuant to 37 CFR §1.53 requiring an extension of time as incorporating a request therefor, and the Commissioner is hereby specifically authorized to charge Deposit Account No. 12-1216 for any fee that may be due in connection with such a request for an extension of time.

23. CORRESPONDENCE ADDRESS

**23548**

PATENT TRADEMARK OFFICE

Name	Jeffrey A. Wyand; Reg. No. 29,458
Signature	
Date	November 17, 2010

INVENTOR INFORMATION

Inventor One Given Name:: Takayuki
Family Name:: MIMURA
Postal Address Line One:: c/o MITSUBISHI DENKI KABUSHIKI KAISHA
Postal Address Line Two:: 2-3, Marunouchi 2-chome, Chiyoda-ku
City:: Toyko
Country:: Japan
Postal or Zip Code:: 100-8310
Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 23548

APPLICATION INFORMATION

Title Line One:: SCENARIO ANALYSIS TYPE CONTROL SYSTEM DE
Title Line Two:: VICE
Total Drawing Sheets:: 9
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: 400929
Secrecy Order in Parent Appl.?: No

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 2000-263942
Filing Date:: 08-31-2000
Country:: Japan
Priority Claimed:: Yes

Source:: PrintEFS Version 1.0.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

TAKAYUKI MIMURA

Serial No.: Unassigned Art Unit: Unassigned

Filed: November 17, 2000 Examiner: Unassigned

For: SCENARIO ANALYSIS
TYPE CONTROL
SYSTEM DEVICE

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D. C. 20231

Dear Sir:

Prior to examination, Applicant requests that the referenced patent application be amended as shown below.

IN THE TITLE

Please delete “TYPE”.

IN THE SPECIFICATION

Page 1, line 5, delete “type”;
line 6, delete “type”;
line 8, delete “type”;
delete “a” (second occurrence);

Page 6, line 14, delete “type”;
line 15, delete “type”;
line 18, delete “type”;
line 21, after “showing” insert --in detail--;
line 22, delete “type”;
delete “in detail”;
line 23, after “showing” insert --in detail--;
line 24, delete “of” (second occurrence);
line 25, delete “in detail”;

line 28, after “showing” insert --in detail--;

line 29, delete “type”;

line 30, delete “in detail”;

Page 7, line 2, delete “type”;

line 5, delete “type”;

line 10, delete “type”;

line 13, delete “type”.

IN THE CLAIMS

1. (Amended) A scenario analysis [type] control system device comprising:

[a] start-up reception means for accepting a periodic start-up;

[a] scenario storage means for storing at least two [or more] text [type] scenarios, each [of which implements] text scenario implementing a specific function and [is] being comprised of control codes;

[a] priority level definition storage means for storing a priority level and a number of steps executable [by one] in response to a single start-up, [which are] provided for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means; and

[a] scenario analysis processing means for, every time said start-up reception means accepts a start-up, determining which text [type] scenario is to be executed next and which [one or more] steps of [one selected] a text [type] scenario selected are to be executed according to priority levels stored in said priority level definition storage means, and for reading a [determined] number of steps of the [selected] text [type] scenario selected from said scenario storage means and executing [them] the number of steps.

2. (Amended) The scenario analysis [type] control system device according to Claim 1, wherein said scenario analysis processing means generates a source program based on the [executed] text [type] scenario executed and data generated by [the] execution of the text [type] scenario.

3. (Amended) The scenario analysis [type] control system device according to Claim 1, further comprising [a] scenario execution trace storage means for storing exclusive execution information for prohibiting execution of any other steps for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein said scenario analysis processing means updates corresponding exclusive execution information stored in said scenario execution trace storage means according to [either] one of an exclusive demand [or] and an exclusive release demand included in a control code executed [of] by the text [type] scenario, and prohibits execution of any other steps [while] when the corresponding exclusive execution information indicates an input of an exclusive demand.

4. (Amended) The scenario analysis [type] control system device according to Claim 1, further comprising [a] scenario execution trace storage means for storing at least one [or more] break [points] point for interrupting execution of a corresponding text [type] scenario for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein when at least one [or more] break [points are] point is included in a control code executed [of] by the text [type] scenario or when receiving a break

point release demand, said scenario analysis processing means writes the at least one [or more] break [points] point into said scenario execution trace storage means or deletes all existing break points for the text [type] scenario from said scenario execution trace storage means, and interrupts the execution of the text [type] scenario while the at least one [or more] break [points are] point is being written in said scenario execution trace storage means.

5. (Amended) The scenario analysis [type] control system device according to Claim 1, further comprising [a] scenario execution trace storage means for storing step execution information for instructing said scenario analysis processing means to execute a corresponding text [type] scenario step by step for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein, when a step execution instruction is included in a control code executed [of] by the text [type] scenario or when receiving a step execution release demand, said scenario analysis processing means updates corresponding step execution information stored in said scenario execution trace storage means, and [performs the execution of] executes the text [type] scenario step by step while the corresponding step execution information indicates an input of the step execution instruction.

6. (Amended) A scenario analysis [type] control system device comprising:

[a] start-up reception means for accepting a start-up from an external program;

[a] scenario storage means for storing at least two [or more] text [type] scenarios, each [of which implements] text scenario implementing a specific function and [is] being comprised of control codes;

[a] priority level definition storage means for storing a priority level and a number of steps executable [by one] in response to a single start-up from said external program, [which are] provided for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means;

[an] event information storage means for storing processing [type] information indicating processing to be performed on external data and scenario identification information indicating one text [type] scenario that is to be executed and is stored in said scenario storage means, [which are] provided for each of at least two [or more] event identifiers; and

[a] scenario analysis processing means for, every time said external program start-up reception means accepts a start-up from [said] the external program, determining which text [type] scenario is to be executed next and

which [one or more] steps of [one selected] a text [type] scenario selected are to be executed from [said] the external program according to priority levels stored in said priority level definition storage means, for reading a [determined] number of steps of the [selected] text [type] scenario selected from said scenario storage means and executing [them] the number of steps, for, when an event identifier and external data are input from [said] the external program, retrieving processing [type] information and scenario identification information corresponding to the event identifier from said event definition storage means, for processing the external data according to the processing [type] information, and for reading one text [type] scenario to be executed from said scenario storage means according to the scenario identification information, and executing the text [type] scenario.

7. (Amended) The scenario analysis [type] control system device according to Claim 6, wherein said scenario analysis processing means generates a source program based on the [executed] text [type] scenario executed and data generated by [the] execution of the text [type] scenario.

8. (Amended) The scenario analysis [type] control system device according to Claim 6, further comprising [a] scenario execution trace storage means for storing exclusive execution information for prohibiting execution of any other steps for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein said scenario analysis processing means updates corresponding exclusive execution information stored in said scenario execution trace storage means according to [either] one of an exclusive demand [or] and an exclusive release demand included in a control code executed [of] by the text [type] scenario, and prohibits execution of any other steps [while] when the corresponding exclusive execution information indicates an input of an exclusive demand.

9. (Amended) The scenario analysis [type] control system device according to Claim 6, further comprising [a] scenario execution trace storage means for storing at least one [or more] break [points] point for interrupting execution of a corresponding text [type] scenario for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein when at least one [or more] break [points are] point is included in a control code executed [of] by the text [type] scenario or when receiving a break

point release demand, said scenario analysis processing means writes the at least one [or more] break [points] point into said scenario execution trace storage means or deletes all existing break points for the text [type] scenario from said scenario execution trace storage means, and interrupts the execution of the text [type] scenario while the at least one [or more] break [points are] point is being written in said scenario execution trace storage means.

10. (Amended) The scenario analysis [type] control system device according to Claim 6, further comprising [a] scenario execution trace storage means for storing step execution information for instructing said scenario analysis processing means to execute a corresponding text [type] scenario step by step for each of [said] the at least two [or more] text [type] scenarios stored in said scenario storage means, wherein, when a step execution instruction is included in a control code executed [of] by the text [type] scenario or when receiving a step execution release demand, said scenario analysis processing means updates corresponding step execution information stored in said scenario execution trace storage means, and [performs the execution of] executes the text [type] scenario step by step while the corresponding step execution information indicates an input of the step execution instruction.

In re Appln. of Takayuki Mimura
Serial No. Unassigned

IN THE ABSTRACT

Please replace the existing Abstract of the Disclosure with the appended
Abstract of the Disclosure.


REMARKS

The foregoing changes are made to improve the form of the patent
application. No new matter has been added and entry is respectfully requested.

A favorable Action on the merits is solicited.

Respectfully submitted,

LEYDIG, VOIT & MAYER



Jeffrey A. Wyand,
Registration No. 29,458

Suite 300
700 Thirteenth Street, N. W.
Washington, D. C. 20005
Telephone: (202) 737-6770
Facsimile: (202) 737-6776
Date: November 17, 2000
JAW:cmcg

ABSTRACT OF THE DISCLOSURE

A scenario analysis control system device includes a start-up reception unit for accepting a periodic start-up, and a scenario storage unit for storing two or more text scenarios, each of which implements a specific function and includes control codes. A priority level definition storage unit stores a priority level and a number of steps executable in response to a single start-up, provided for each of the two or more text scenarios stored in the scenario storage unit. Every time the start-up reception unit accepts a start-up, a scenario analysis processing unit determines which text scenario is to be executed next and which one or more steps of one selected text scenario are to be executed according to the priority levels respectively assigned to the two or more text scenarios. The scenario analysis processing unit then reads a determined number of steps of the selected text scenario from the scenario storage unit and executes them

SCENARIO ANALYSIS TYPE CONTROL SYSTEM DEVICE

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a scenario analysis type control system device that dynamically analyzes a text type control scenario comprised of control codes, converts the text type control scenario into a statement written in a machine language code by code, and executes the statement so as to control an object to be controlled.

Description of the Prior Art

Fig. 11 is an explanatory drawing showing a prior art text type control scenario. The prior art scenario analysis type control system devices deciphers each step of a text type control scenario comprised of control codes, which a user made, under batch control, converts the text type control scenario into a statement written in a machine language, and executes the statement so as to control an object to be controlled.

Thus, since the prior art scenario analysis type control system device simply executes one text type control scenario step by step, the prior art scenario analysis type control system device cannot accept a control event specific to the control system. Furthermore, the prior art scenario analysis type control system device cannot implement a pseudomultitasking environment in which it can execute two or more text type scenarios by switching between these text type control scenarios.

In addition, in the prior art scenario analysis type control system device, a storage unit for storing one text type control scenario and another storage unit for storing dynamic

data generated at the time of execution of the text type control scenario are not separated from each other. Therefore, when replacing the text type control scenario being executed with another text type control scenario, the prior art scenario analysis type control system device has to do so and execute it after suspending the current execution of the text type control scenario to prevent the dynamic data from disappearing. And, when switching back to the text type control scenario, the prior art scenario analysis type control system device has to execute it from the ground up. Thus, the prior art scenario analysis type control system device is not able to perform an online replacement.

Furthermore, the prior art scenario analysis type control system device cannot exclusively perform execution of any step other than fixed steps of the text type control scenarios.

A problem with a prior art scenario analysis type control system device constructed as above is that it cannot perform an acceptance of any control event, pseudomultitasking, an online replacement, and an exclusive operation, and therefore this results in inconvenience for users.

SUMMARY OF THE INVENTION

The present invention is proposed to solve the above-mentioned problems. It is therefore an object to provide a scenario analysis type control system device that can perform an acceptance of any control event, pseudomultitasking, an online replacement, and an exclusive operation.

In accordance with an aspect of the present invention, there is provided a scenario analysis type control system device comprising: a start-up reception unit for accepting a periodic

start-up; a scenario storage unit for storing two or more text type scenarios each of which implements a specific function and is comprised of control codes; a priority level definition storage unit for storing a priority level and a number of steps executable by one start-up, which are provided for each of the two or more text type scenarios stored in the scenario storage unit; and a scenario analysis processing unit for, every time the start-up reception unit accepts a start-up, determining which text type scenario is to be executed next and which one or more steps of one selected text type scenario are to be executed according to priority levels stored in the priority level definition storage unit, and for reading the determined number of steps of the selected text type scenario from the scenario storage unit and executing them.

In accordance with another aspect of the present invention, there is provided a scenario analysis type control system device comprising: a start-up reception unit for accepting a start-up from an external program; a scenario storage unit for storing two or more text type scenarios each of which implements a specific function and is comprised of control codes; a priority level definition storage unit for storing a priority level and a number of steps executable by one start-up from the external program, which are provided for each of the two or more text type scenarios stored in the scenario storage unit; an event definition storage unit for storing processing type information indicating processing to be performed on external data and scenario identification information indicating one text type scenario that is to be executed and is stored in the scenario storage unit, which are provided for each of two or more event identifiers; and a

scenario analysis processing unit for, every time the external program start-up reception unit accepts a start-up from the external program, determining which text type scenario is to be executed next and which one or more steps of one selected
5 text type scenario are to be executed according to priority levels stored in the priority level definition storage unit, for reading the determined number of steps of the selected text type scenario from the scenario storage unit and executing them, for, when an event identifier and external data are input from
10 the external program, retrieving processing type information and scenario identification information corresponding to the event identifier from the event definition storage unit, for processing the external data according to the processing type information, and for reading one text type scenario to be
15 executed from the scenario storage unit according to the scenario identification information and executing the text type scenario.

In accordance with a further aspect of the present invention, the scenario analysis processing unit generates a
20 source program based on the executed text type scenario and data generated by the execution of the text type scenario.

In accordance with another aspect of the present invention, the scenario analysis type control system device further comprises a scenario execution trace storage unit for
25 storing exclusive execution information for prohibiting execution of any other steps for each of the two or more text type scenarios stored in the scenario storage unit. Furthermore, the scenario analysis processing unit updates corresponding exclusive execution information stored in the
30 scenario execution trace storage unit according to either an

exclusive demand or an exclusive release demand included in a control code executed of the text type scenario, and prohibits execution of any other steps while the corresponding exclusive information indicates an input of an exclusive demand.

5 In accordance with a further aspect of the present invention, the scenario analysis type control system device further comprises a scenario execution trace storage unit for storing one or more break points for interrupting execution of a corresponding text type scenario for each of the two or more
10 text type scenarios stored in the scenario storage unit.

Furthermore, when one or more break points are included in a control code executed of the text type scenario or when receiving a break point release demand, the scenario analysis processing unit writes the one or more break points into the
15 scenario execution trace storage unit or deletes all existing break points for the text type scenario from the scenario execution trace storage unit, and interrupts the execution of the text type scenario while the one or more break points are being written in the scenario execution trace storage unit.

20 In accordance with another aspect of the present invention, the scenario analysis type control system device further comprises a scenario execution trace storage unit for storing step execution information for instructing the scenario analysis processing unit to execute a corresponding text type
25 scenario step by step for each of the two or more text type scenarios stored in the scenario storage unit. Furthermore, when a step execution instruction is included in a control code executed of the text type scenario or when receiving a step execution release demand, the scenario analysis processing unit
30 updates corresponding step execution information stored in the

scenario execution trace storage unit, and performs the execution of the text type scenario step by step while the corresponding step execution information indicates an input of the step execution instruction.

5 Further objects and advantages of the present invention will be apparent from the following description of the preferred embodiments of the invention as illustrated in the accompanying drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a scenario analysis type control system device according to a first embodiment of the present invention;

15 Fig. 2 is an explanatory drawing showing a text type scenario storage unit of the scenario analysis type control system device according to the first embodiment in detail;

Fig. 3 is an explanatory drawing showing a CPU and a scenario analysis controller of the scenario analysis type control system device according to the first embodiment in detail;

20 Fig. 4 is an explanatory drawing showing various tables stored in the text type scenario storage unit in detail;

Fig. 5 is an explanatory drawing showing a scenario execution trace table of the scenario analysis controller of in detail;

25 Fig. 6 is a flow chart showing processes performed by a scenario analysis engine of the scenario analysis controller;

Fig. 7 is an explanatory drawing showing a main storage of a scenario analysis type control system device according to a second embodiment of the present invention in detail;

Fig. 8 is a flow chart showing processes performed by a scenario analysis engine of the scenario analysis type control system device according to the second embodiment;

Fig. 9 is a flow chart showing processes performed by a
 5 scenario analysis engine of a scenario analysis type control system device according to a third embodiment of the present invention;

Fig. 10 is an explanatory drawing showing execution information area of a scenario execution trace table of a
 10 scenario analysis type control system device according to a fourth embodiment of the present invention in detail; and

Fig. 11 is an explanatory drawing for showing a prior art text type control scenario.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiment 1.

Fig. 1 is a block diagram showing a scenario analysis type control system device according to a first embodiment of the present invention. In the figure, reference numeral 1 denotes
 20 a main storage unit, numeral 2 denotes a CPU, and numeral 3 denotes a secondary storage unit such as a magnetic disk. The main storage unit 1 includes a text type scenario storage 11, and a scenario analysis controller 12.

Fig. 2 is an explanatory drawing showing the text type
 25 scenario storage in detail. In the figure, reference numeral 13 denotes each of two or more text type scenarios which are provided for two or more different functions, respectively, numeral 14 denotes an event definition table for storing key information defined to make it possible for the scenario
 30 analysis type control system device to perform processing

easily when an external or internal factor triggers the scenario analysis type control system device to start control, and numeral 15 denotes a priority level definition table for storing priorities respectively assigned to a plurality of text type scenarios 13.

Fig. 3 is an explanatory drawing showing the CPU 2 and the scenario analysis controller 12 in detail. In the figure, reference numeral 21 denotes a clock disposed in the CPU 2, for generating a timed pulse to start the scenario analysis controller 12 at predetermined intervals. Furthermore, in the scenario analysis controller 12, reference numeral 22 denotes a dynamic data storage area for storing data that appears or disappears when the scenario analysis controller 12 performs a control processing, numeral 23 denotes a scenario execution trace table used for the scenario analysis controller 12 to trace execution, and numeral 24 denotes a scenario analysis engine for analyzing one text type scenario 13 to be executed, and for actually executing the text type scenario 13 according to the analysis result.

Fig. 4 is an explanatory drawing showing various tables stored in the text type scenario storage 11 in detail. In each text type scenario 13, reference numeral 31 denotes a scenario data area, and numeral 32 denotes a static data area. Furthermore, in the scenario data area 31, reference numeral 33 denotes a control code that can be analyzed with the scenario analysis engine 24 and that is described in the text format, and numeral 34 denotes data storage destination information describing a label indicating a destination where a data constellation output from the scenario analysis engine 24 is stored in the dynamic data storage area 22 when the CPU executes

the corresponding control code 33. The data storage destination information 34 is the one which makes it possible for other control codes to refer to the data constellation. In addition, in the static data area 32, reference numeral 35 denotes data handling key information describing label key information to be used by a control code 33, and numeral 36 denotes data for describing information indicated directly or indirectly by the label key information. Thus, each text type scenario 13 is comprised of the scenario data area 31 where the control logic is described with a description method, such as a high order language, used when the user makes a program, and the static data area 32 where various parameters intended to be used for the control logic are defined.

In the event definition table 14, reference numeral 37 denotes an event number area for storing an event number defined as key information for indicating a process of transferring external data between the scenario analysis controller and an external program, which will be described later in Embodiment 2, numeral 38 denotes a processing type area for storing processing type data describing in a code the process of transferring external data between the scenario analysis controller and the external program, each processing type data being associated with a corresponding event number, and numeral 39 denotes a to-be-executed scenario number area for storing a scenario number identifying one text type scenario 13 to be executed, each scenario number being associated with a corresponding event number.

In the priority level definition table 15, reference numeral 40 denotes a scenario number area for storing a scenario number assigned to each text type scenario 13, numeral 41

denotes a priority level area for storing a priority level showing the order in which each text type scenario 13 is to be executed, which is preset according to the contents of each text type scenario, and numeral 42 denotes a step number area for
 5 storing a number of steps of each text type scenario 13 that are executable by a start-up of the scenario analysis engine 24.

Fig. 5 is a diagram showing the structure of the scenario execution trace table in detail. In the figure, reference
 10 numeral 43 denotes a scenario number area for storing the scenario number assigned to each text type scenario 13, numeral 44 denotes an execution information area for storing execution information about the most-recently-executed step of each text type scenario 13, and numeral 45 denotes an exclusive key
 15 storage area in which exclusive key information corresponding to one text type scenario to be executed is stored to prohibit execution of any other steps.

Fig. 6 is a flow chart showing processes preformed by the scenario analysis engine according to the first embodiment. In
 20 the figure, reference numeral 51 denotes a start-up reception unit that accepts a periodic start-up from the clock 21, numeral 52 denotes a priority level determination unit for determining which priority level is assigned to each text type scenario so as to select a text type scenario 13 to be executed next, this
 25 priority level determination unit including a priority level determination processing 53 for searching through the priority level area 41 of the priority level definition table 15 shown in Fig. 4, and for retrieving the plurality of scenario numbers one by one in rotation from the scenario number area 40 in order
 30 of the priority levels corresponding to the plurality of

scenario numbers, respectively, and a priority level weighting processing 54 for providing a number of steps executable by one start-up of the scenario analysis engine 24, which corresponds to the retrieved scenario number, numeral 55 denotes a step execution determination unit for determining whether or not the control code of each step to be executed is executable, and numeral 56 denotes a control code analysis unit for analyzing the control code of each step to be executed, and numeral 57 denotes a processing execution unit for performing processing based on the control code of each step to be executed.

In operation, the user describes two or more text type scenarios 13, an event definition table 14, and a priority level definition table 15 according to the description of control of an object to be controlled, in advance, and loads them into the text type scenario pack storage of the main storage unit 1 of Fig. 1, as shown in Fig. 4. It is assumed that the scenario analysis controller 12 has already been installed in the main storage 1.

Next, the operation of the scenario analysis type control system device will be described with reference to the flow chart of Fig. 6 showing the operation of the scenario analysis engine 24. The start-up reception unit 51 accepts a periodic start-up from the clock 21 shown in Fig. 3. Every time the start-up reception unit 51 receives a start-up, the scenario analysis engine 24 advances to the next step in which the priority level determination unit 52 performs processing. First, the priority level determination unit 52 searches for the highest priority level through the priority level area 41 of the priority level definition table 15 shown in Fig. 4, and retrieves one scenario number corresponding to the highest

priority level stored in the priority level area from the scenario number area 40, through the priority level determination processing 53. Furthermore, the priority level determination unit 52 retrieves a number of steps executable
5 by one start-up of the scenario analysis engine 24 and corresponding to the highest priority level from the step number area 42 through the priority level weighting processing 54. The scenario analysis engine 24 then advances to the next step in which the step execution determination unit 55 performs
10 processing. When failing in the extraction of either a scenario number or a number of steps, the priority level determination unit 52 performs the above-mentioned processing over again in response to the next start-up. In addition, the processing is assumed to be executed and to be complete if judged that the
15 processing ended.

After the execution of steps of the text type scenario with the highest priority level, in response to the next start-up, the priority level determination unit 52 searches for the second-highest priority level through the priority level
20 area 41 of the priority level definition table 15, and retrieves one scenario number corresponding to the second-highest priority level stored in the priority level area from the scenario number area 40. The priority level determination unit 52 then retrieves a number of steps executable by one start-up
25 of the scenario analysis engine 24 and corresponding to the second-highest priority level from the step number area 42. Thus, the priority level determination unit 52 can extract the plurality of scenario numbers one by one in rotation from the scenario number area 40 of the priority level definition table
30 15 in order of the priority levels respectively assigned to the

plurality of text type scenarios 13. After retrieving one scenario number from the scenario number area 40, the priority level determination unit 52 can also extract a number of steps executable by one start-up of the scenario analysis engine 24 and corresponding to the scenario number retrieved. Furthermore, after the scenario analysis engine executes one text type scenario with the lowest priority level, the priority level determination unit 52 searches for the highest priority level through the priority level area 41 of the priority level definition table 15 again.

The step execution determination unit 55 identifies the most-recently-executed step by searching through the execution information area 44 of the scenario execution trace table 23 shown in Fig. 5 according to the scenario number retrieved by the priority level determination unit 52, and further determines which one or more steps of the text type scenario 13 to be executed should be executed next. The scenario execution trace table 23 is a blank column at the first-time execution of the text type scenario, and each column in the scenario execution trace table 23 is written by the processing execution unit 57, which will be described later. Accordingly, when the scenario execution trace table 23 is a blank column or the scenario number area 43 of the scenario execution trace table 23 does not include the scenario number retrieved by the priority level determination unit 52, it is determined that the first step of the corresponding text type scenario 13 will be executed. On the other hand, the step execution determination unit 55 refers to the exclusive key storage area 45 when the corresponding scenario number is written in the scenario number area 43 of the scenario execution trace table 23. In other words,

the step execution determination unit 55 searches through part of the exclusive key storage area 45 corresponding to scenario numbers other than the corresponding scenario number so as to determine whether exclusive key information is written in the
 5 part of the exclusive key storage area 45. And, the scenario analysis engine 24 returns to the above-mentioned step in which the priority level determination unit 52 performs processing when exclusive key information is written in the part of the exclusive key storage area corresponding to scenario numbers
 10 other than the corresponding scenario number, and waits for the next start-up. Otherwise, the scenario analysis engine 24 advances to the next step in which the control code analysis unit 56 performs processing.

The control code analysis unit 56 reads one or more
 15 corresponding control codes 33 and corresponding data storage destination information 34 from the scenario data area 31 of the text type scenario 13 shown in Fig. 4 according to the execution information retrieved from the execution information area 44 of the scenario execution trace table 23 by the step
 20 execution determination unit 55 and the number of executable steps retrieved from the step number area 42 of the priority level definition table 15 by the priority level weighting processing 54. In other words, the control code analysis unit 56 reads one or more control codes 33 and one or more pieces
 25 of data storage destination information 34 only by the number of executable steps retrieved from the step number area 42 with a step next to the most-recently-executed step within the execution information area 44 as the head of these steps. After that, the processing execution unit 57 checks whether each read
 30 control code 33 is a code that can be recognized. Furthermore,

when each read control code 33 uses the static data area 32, the processing execution unit 57 checks whether corresponding data handling key information 35 and data 36 are information which can be recognized. If these checking results are good, the scenario analysis engine 24 advances to the next step in which the processing execution unit 57 performs processing. In contrast, if either of the checking results is defective, the scenario analysis engine 24 returns to the above-mentioned step in which the priority level determination unit 52 performs processing and then waits for the next start-up.

The processing execution unit 57 performs processing based on each control code 33 read by the control code analysis unit 56. When label key information is stored in one control code 33 to be executed, the processing execution unit 57 uses the data 36 in the static data area 32 corresponding to the label key information during the execution of the control code. Dynamic data obtained during the execution are written into the dynamic data storage area 22 shown in Fig. 5 according to the corresponding data storage destination information 34, and can be referred to during execution based on any other control code. After that, the processing execution unit 57 searches through the scenario number area 43 of the scenario execution trace table 23 for the corresponding scenario number, and updates the corresponding execution information according to the executed number of steps so that the execution information represents the last one of the steps currently executed. Furthermore, the processing execution unit 57 writes exclusive key information in a corresponding exclusive key storage area 45 if the executed control code 33 has an exclusive demand, and deletes exclusive key information from the corresponding exclusive key storage

area 45 if the executed control code 33 has an exclusive release demand. When thus completing the execution, the scenario analysis engine 24 then returns to the above-mentioned step in which the priority level determination unit 52 performs
5 processing again in response to the next start-up, and ends the processing if determined for the processing to have ended in the priority level determination unit 52.

The use of the event definition table 14 shown in Fig. 4 will be explained in Embodiment 2.

10 As mentioned above, in accordance with the first embodiment, the scenario analysis type control system device can limit the number of steps of each text type scenario 13 that are executable by one start-up of the scenario analysis engine, and, after executing the limited number of steps of one text
15 type scenario 13 with a higher priority level, shift to execution of another text type scenario 13 with a second-higher priority level. In other words, the scenario analysis type control system device can execute a plurality of text type scenarios 13 stored therein, each of which implements a specific
20 function, in rotation by switching between them according to the priority levels assigned to them while providing a weight to each of the plurality of text type scenarios, thereby implementing pseudomultitasking. In addition, the scenario analysis type control system device can implement an online
25 replacement without deleting data from the dynamic data storage area 22 when the scenario analysis type control system device replaces one text type scenario 13 being executed with another text type scenario 13 because the text type scenario being executed is separated from the dynamic data storage area 22
30 where data generated by the execution of the text type scenario

is stored. Furthermore, when the executed control code has an exclusive demand, the scenario analysis type control system device can perform an exclusive process according to the exclusive demand.

5

Embodiment 2.

Fig. 7 is an explanatory drawing showing a main storage unit according to a second embodiment of the present invention in detail. In the figure, reference numeral 61 denotes an external program for performing a process of starting a scenario analysis controller 12. The external program 61 executes the process of starting the scenario analysis controller 12, adds a variety of key information to external data, and furnishes the addition result to the scenario analysis controller 12. Fig. 8 is a flow chart showing processes performed by a scenario analysis engine of the scenario analysis controller 12. In the figure, reference numeral 58 denotes a start-up reception unit that accepts a start-up from the external program 61. The main storage unit according to this embodiment has the same structure as that of the first embodiment except the components mentioned above.

In operation, the start-up reception unit 58 of Fig. 8 accepts a start-up generated by the execution of the external program 61 shown in Fig. 7. When external data and key information added to the external data are input from the external program 61 after accepting a start-up from the external program, the start-up reception unit 58 compares the key information against a list of event number data stored in an event number area 37 of an event definition table 14 shown in Fig. 4. And, when event number data that matches the key

information exists in the event number area 37 of the event definition table 14, the start-up reception unit 58 retrieves corresponding processing type data from a processing type area 38 and a corresponding scenario number from an execution
5 scenario number area 39. The processing type data is the one describing a process to be done for the external data in a code according to the corresponding event number, i.e., the key information. When the corresponding processing type data is a code describing a process of retrieving and storing the
10 external data in a dynamic data storage area 22, the start-up reception unit 58 retrieves the external data and stores it in the dynamic storing data area 22. And, the scenario analysis engine 24 advances to the next step in which a priority level determination unit 52 performs processing.

15 The priority level determination unit 52 specifies one text type scenario 13 to be executed according to the scenario number extracted from the execution scenario number area 39 of the event definition table 14 by the start-up reception unit 58.

20 Like the first embodiment, a step execution determination unit 55 and a control code analysis unit 56 perform processing as follows. The processing execution unit 57 processes the external data that has been input from the external program 61 and stored in the dynamic storing data area 22 by executing the
25 text type scenario 13 corresponding to the key information added to the external data.

As mentioned above, in accordance with the second embodiment, when key information and external data are input from the external program 61, the scenario analysis type control
30 system device can process the external data according to

processing type data corresponding to the key information, and execute one text type scenario 13 corresponding to the key information. The scenario analysis type control system device can thus accept any control event.

5

Embodiment 3.

Fig. 9 is a flow chart showing processes performed by a scenario analysis engine according to a third embodiment of the present invention. The scenario analysis engine according to this embodiment includes a first start-up reception unit 51 for receiving a periodic start-up from a clock of a CPU and a second start-up reception unit 58 for receiving a start-up form an external program, as shown in the figure. That is, the scenario analysis engine has both the functions of those of the first and second embodiments. In addition, reference numeral 59 denotes a source program output unit for generating a source program by retrieving and combining one text type scenario 13 executed by a processing execution unit 57, data generated by the execution of the text type scenario and stored in a dynamic data storage area 22, and corresponding data handling key information 35 and data 36 stored in a static data area 32. The scenario analysis engine according to the third embodiment includes the same structure as those of the above-mentioned first and second embodiments except the above-mentioned structure.

25

In operation, after executing one text type scenario 13, the scenario analysis engine 24 advances to the next step in which the source program output unit 59 performs processing. When the text type scenario 13 executed by the processing execution unit 57, data generated by the execution and stored

30

in the dynamic storing data area 22, and the control codes 33 of the text type scenario 13 use the static data area 32, the source program output unit 59 generates a source program by retrieving and adding corresponding data handling key
 5 information 35 and data 36 to the text type scenario 13 executed and the data generated by the execution and stored in the dynamic storing data area 22.

And, the scenario analysis engine 24 sequentially stores the source program generated by the source program output unit
 10 59 in either a main storage unit 1 or a secondary storage device 3 of Fig. 1. After that, the scenario analysis engine 24 returns to the above-mentioned step in which a priority level determination unit 52 performs processing, like the above-mentioned first and second embodiments.

As mentioned above, in accordance with the third
 15 embodiment, the scenario analysis engine 24 can generate a source program by using the source program output unit 59. According to circumstances, in consideration of the load imposed on a CPU 2 that causes the scenario analysis type control
 20 system device to operate, the scenario analysis engine 24 can switch from the execution of one text type scenario 13 which is a higher load for the CPU 2 to the execution of a generated source program which is a lower load for the CPU 2.

25 Embodiment 4.

Fig. 10 is an explanatory drawing showing in detail an execution information area 44 of a scenario execution trace table 23 according to a fourth embodiment of the present invention. In the figure, reference numeral 47 denotes a break
 30 point information area for storing break point information used

for instructing a scenario analysis engine to interrupt execution, and numeral 48 denotes a step execution information area for storing step execution information used for instructing the scenario analysis engine to execute step by step one text type scenario regardless of the priority level assigned to the scenario. The scenario execution trace table 23 according to this embodiment has the same structure as that the third embodiment with the except that it further includes the break point information and the step execution information.

In operation, when debugging one text type scenario 13, the user describes either one or more break points where execution is to be interrupted or a step execution instruction for instructing the scenario analysis engine to execute the text type scenario step by step regardless of the priority level assigned to it within an arbitrary control code 33 of the text type scenario 13.

In Fig. 9, when a processing execution unit 57 executes the control code 33 of one break point and the step execution instruction, the processing execution unit 57 writes the information as either break point information or step execution information in the corresponding area 47 or 48 of the scenario execution trace table 23 shown in Fig. 10, and continues the processing.

Next, the scenario analysis engine 24 advances to the next step in which a step execution determination unit 55 performs processing after processing a priority level determination unit 52, and searches the break point information area 47 and the step execution information area 48 within the scenario execution trace table 23 with the step execution determination unit 55. When break point information is written in the break

point information area 47 of the scenario execution trace table 23, the scenario analysis engine 24 interrupts the execution of the text type scenario without advancing to the next step in which a control code analysis unit 56 performs processing, and then returns to the above-mentioned step in which the priority level determination unit 52 performs processing. After that, the scenario analysis engine 24 keeps interrupting the execution of the text type scenario 13 while the break point information is being written in the scenario execution trace table 23. When a break point release demand is input from outside the system by the user, the scenario analysis engine 24 deletes the written break point information, and restarts the execution of the text type scenario.

On the other hand, when step execution information is written in the step execution information 48 of the scenario execution trace table 23, the scenario analysis engine 24 executes the text type scenario 13 step by step regardless of the priority level assigned to it according to a corresponding step execution demand input from outside the system by the user. When a step execution release demand is then input from outside the system by the user, the scenario analysis engine 24 deletes the written step execution information, and releases the step execution.

As mentioned above, in accordance with the fourth embodiment of the present invention, the scenario analysis engine 24 can interrupt the execution of each text type scenario 13 at one or more arbitrary break points, and execute each text type scenario 13 step by step, thereby debugging each text type scenario 13 easily.

Many widely different embodiments of the present

invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present invention is not limited to the specific embodiments described in the specification, except as defined
5 in the appended claims.

WHAT IS CLAIMED IS:

1. A scenario analysis type control system device comprising:

5 a start-up reception means for accepting a periodic start-up;

a scenario storage means for storing two or more text type scenarios each of which implements a specific function and is comprised of control codes;

10 a priority level definition storage means for storing a priority level and a number of steps executable by one start-up, which are provided for each of said two or more text type scenarios stored in said scenario storage means; and

a scenario analysis processing means for, every time said
15 start-up reception means accepts a start-up, determining which text type scenario is to be executed next and which one or more steps of one selected text type scenario are to be executed according to priority levels stored in said priority level definition storage means, and for reading a determined number
20 of steps of the selected text type scenario from said scenario storage means and executing them.

2. The scenario analysis type control system device according to Claim 1, wherein said scenario analysis processing
25 means generates a source program based on the executed text type scenario and data generated by the execution of the text type scenario.

3. The scenario analysis type control system device
30 according to Claim 1, further comprising a scenario execution

trace storage means for storing exclusive execution information for prohibiting execution of any other steps for each of said two or more text type scenarios stored in said scenario storage means, wherein said scenario analysis processing means updates
5 corresponding exclusive execution information stored in said scenario execution trace storage means according to either an exclusive demand or an exclusive release demand included in a control code executed of the text type scenario, and prohibits execution of any other steps while the corresponding exclusive
10 information indicates an input of an exclusive demand.

4. The scenario analysis type control system device according to Claim 1, further comprising a scenario execution trace storage means for storing one or more break points for
15 interrupting execution of a corresponding text type scenario for each of said two or more text type scenarios stored in said scenario storage means, wherein when one or more break points are included in a control code executed of the text type scenario or when receiving a break point release demand, said scenario
20 analysis processing means writes the one or more break points into said scenario execution trace storage means or deletes all existing break points for the text type scenario from said scenario execution trace storage means, and interrupts the execution of the text type scenario while the one or more break
25 points are being written in said scenario execution trace storage means.

5. The scenario analysis type control system device according to Claim 1, further comprising a scenario execution
30 trace storage means for storing step execution information for

instructing said scenario analysis processing means to execute a corresponding text type scenario step by step for each of said two or more text type scenarios stored in said scenario storage means, wherein when a step execution instruction is included
5 in a control code executed of the text type scenario or when receiving a step execution release demand, said scenario analysis processing means updates corresponding step execution information stored in said scenario execution trace storage means, and performs the execution of the text type scenario step
10 by step while the corresponding step execution information indicates an input of the step execution instruction.

6. A scenario analysis type control system device comprising:

15 a start-up reception means for accepting a start-up from an external program;

a scenario storage means for storing two or more text type scenarios each of which implements a specific function and is comprised of control codes;

20 a priority level definition storage means for storing a priority level and a number of steps executable by one start-up from said external program, which are provided for each of said two or more text type scenarios stored in said scenario storage means;

25 an event definition storage means for storing processing type information indicating processing to be performed on external data and scenario identification information indicating one text type scenario that is to be executed and is stored in said scenario storage means, which are provided
30 for each of two or more event identifiers; and

a scenario analysis processing means for, every time said external program start-up reception means accepts a start-up from said external program, determining which text type scenario is to be executed next and which one or more steps of one selected text type scenario are to be executed from said external program according to priority levels stored in said priority level definition storage means, for reading a determined number of steps of the selected text type scenario from said scenario storage means and executing them, for, when an event identifier and external data are input from said external program, retrieving processing type information and scenario identification information corresponding to the event identifier from said event definition storage means, for processing the external data according to the processing type information, and for reading one text type scenario to be executed from said scenario storage means according to the scenario identification information and executing the text type scenario.

7. The scenario analysis type control system device according to Claim 6, wherein said scenario analysis processing means generates a source program based on the executed text type scenario and data generated by the execution of the text type scenario.

8. The scenario analysis type control system device according to Claim 6, further comprising a scenario execution trace storage means for storing exclusive execution information for prohibiting execution of any other steps for each of said two or more text type scenarios stored in said scenario storage

means, wherein said scenario analysis processing means updates corresponding exclusive execution information stored in said scenario execution trace storage means according to either an exclusive demand or an exclusive release demand included in a control code executed of the text type scenario, and prohibits execution of any other steps while the corresponding exclusive information indicates an input of an exclusive demand.

9. The scenario analysis type control system device according to Claim 6, further comprising a scenario execution trace storage means for storing one or more break points for interrupting execution of a corresponding text type scenario for each of said two or more text type scenarios stored in said scenario storage means, wherein when one or more break points are included in a control code executed of the text type scenario or when receiving a break point release demand, said scenario analysis processing means writes the one or more break points into said scenario execution trace storage means or deletes all existing break points for the text type scenario from said scenario execution trace storage means, and interrupts the execution of the text type scenario while the one or more break points are being written in said scenario execution trace storage means.

10. The scenario analysis type control system device according to Claim 6, further comprising a scenario execution trace storage means for storing step execution information for instructing said scenario analysis processing means to execute a corresponding text type scenario step by step for each of said two or more text type scenarios stored in said scenario storage

means, wherein when a step execution instruction is included in a control code executed of the text type scenario or when receiving a step execution release demand, said scenario analysis processing means updates corresponding step execution

5 information stored in said scenario execution trace storage means, and performs the execution of the text type scenario step by step while the corresponding step execution information indicates an input of the step execution instruction.

(100)
 (101)
 (102)
 (103)
 (104)
 (105)
 (106)
 (107)
 (108)
 (109)
 (110)
 (111)
 (112)
 (113)
 (114)
 (115)
 (116)
 (117)
 (118)
 (119)
 (120)
 (121)
 (122)
 (123)
 (124)
 (125)
 (126)
 (127)
 (128)
 (129)
 (130)
 (131)
 (132)
 (133)
 (134)
 (135)
 (136)
 (137)
 (138)
 (139)
 (140)
 (141)
 (142)
 (143)
 (144)
 (145)
 (146)
 (147)
 (148)
 (149)
 (150)
 (151)
 (152)
 (153)
 (154)
 (155)
 (156)
 (157)
 (158)
 (159)
 (160)
 (161)
 (162)
 (163)
 (164)
 (165)
 (166)
 (167)
 (168)
 (169)
 (170)
 (171)
 (172)
 (173)
 (174)
 (175)
 (176)
 (177)
 (178)
 (179)
 (180)
 (181)
 (182)
 (183)
 (184)
 (185)
 (186)
 (187)
 (188)
 (189)
 (190)
 (191)
 (192)
 (193)
 (194)
 (195)
 (196)
 (197)
 (198)
 (199)

ABSTRACT OF THE DISCLOSURE

A scenario analysis type control system device comprises a start-up reception unit for accepting a periodic start-up, and a scenario storage unit for storing two or more text type scenarios each of which implements a specific function and is comprised of control codes. A priority level definition storage unit stores a priority level and a number of steps executable by one start-up, which are provided for each of the two or more text type scenarios stored in the scenario storage unit. Every time the start-up reception unit accepts a start-up, a scenario analysis processing unit determines which text type scenario is to be executed next and which one or more steps of one selected text type scenario are to be executed according to the priority levels respectively assigned to the two or more text type scenarios. The scenario analysis processing unit then reads a determined number of steps of the selected text type scenario from the scenario storage unit and executes them.

FIG.1

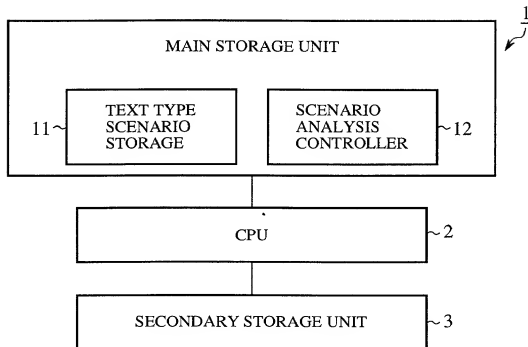


FIG.2

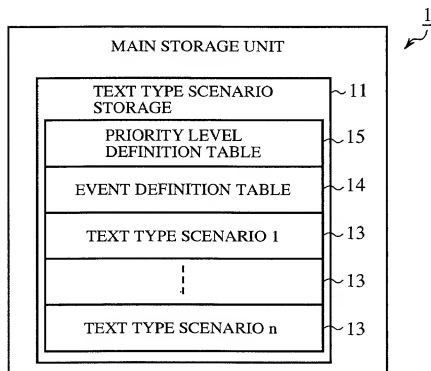


FIG.3

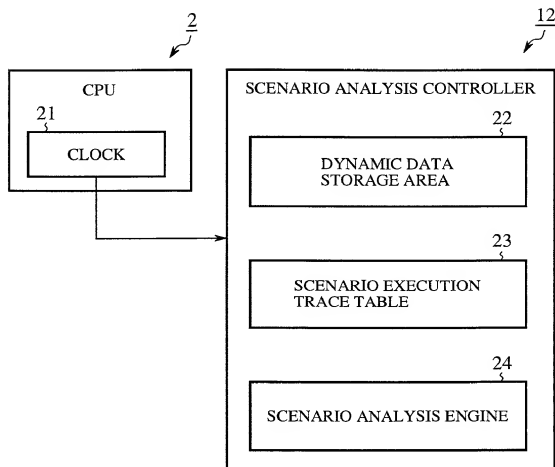


FIG. 4

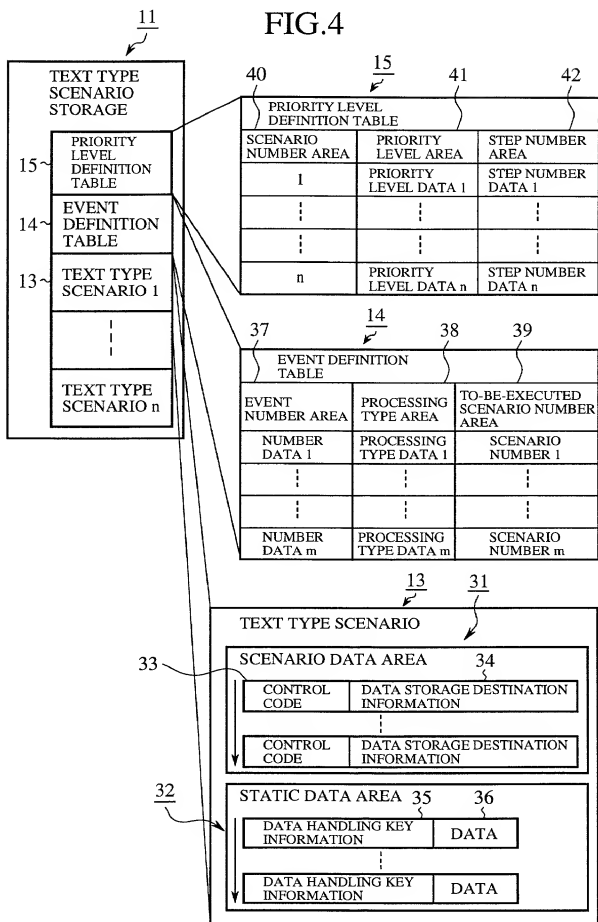


FIG.5

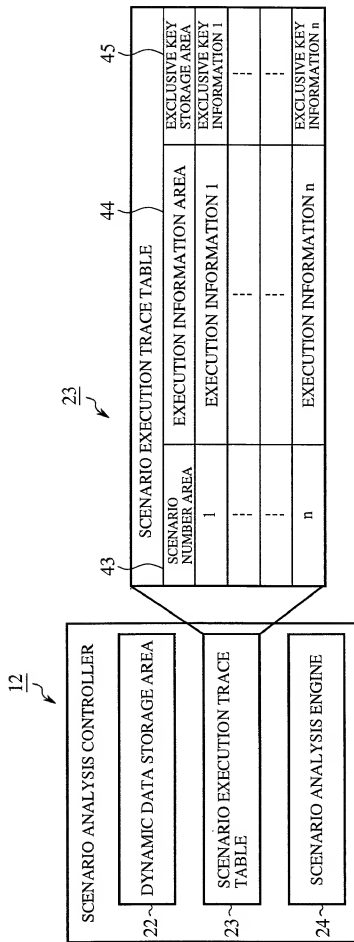


FIG.6

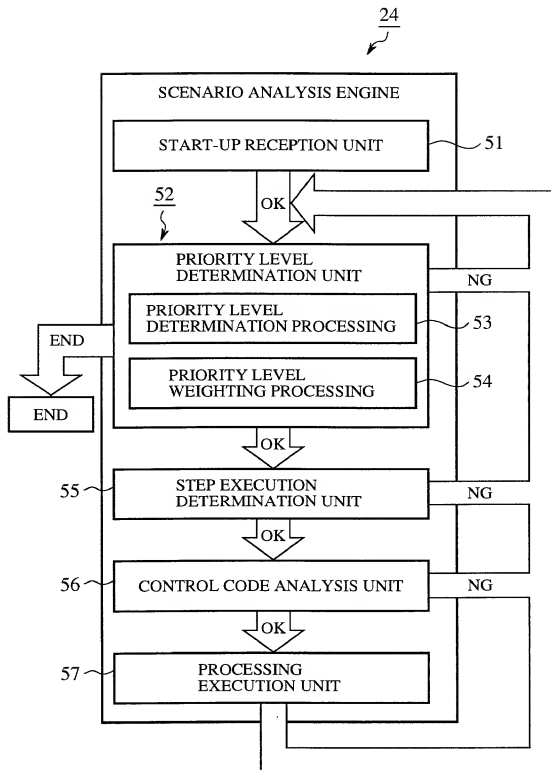


FIG. 7

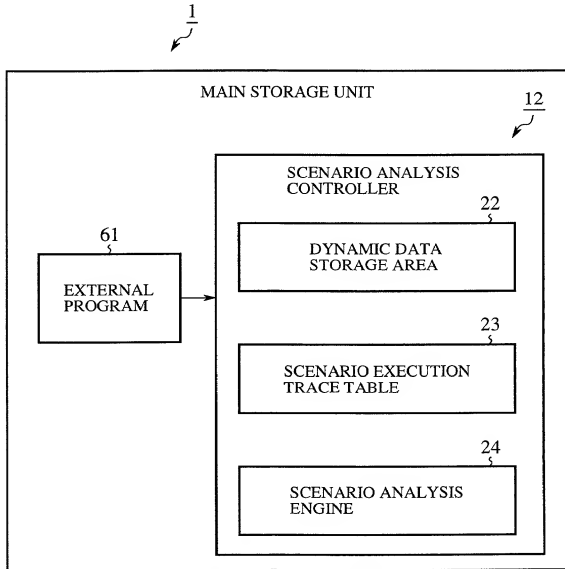


FIG.8

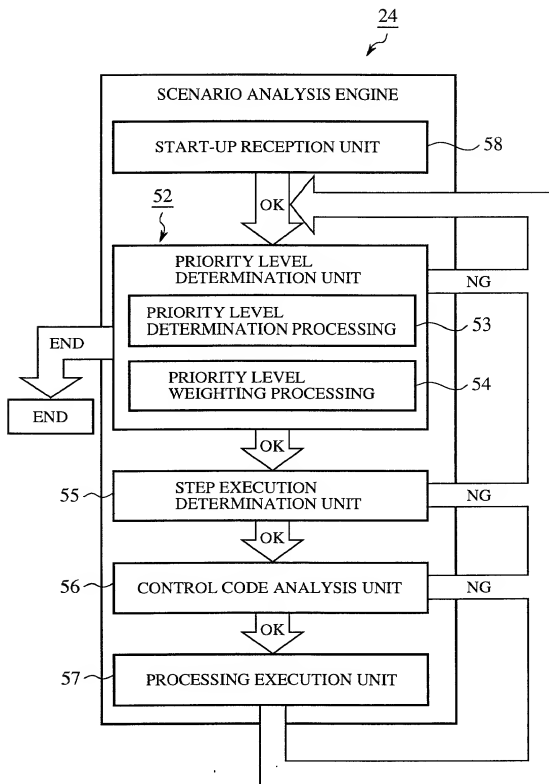


FIG.9

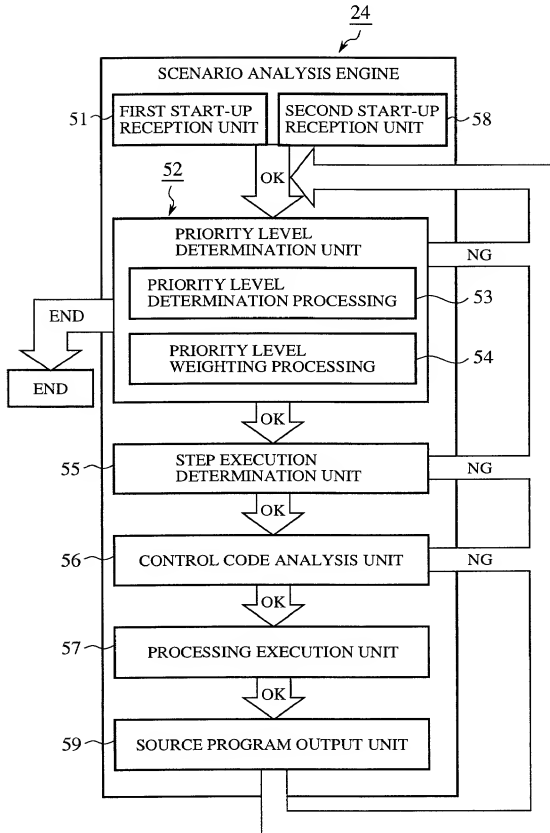



FIG.10

44
↓ 47

48

EXECUTION INFORMATION AREA			
EXECUTION INFORMATION 1	BREAK POINT INFORMATION 1	STEP EXECUTION INFORMATION 1	
⋮	⋮	⋮	
⋮	⋮	⋮	
EXECUTION INFORMATION n	BREAK POINT INFORMATION n	STEP EXECUTION INFORMATION n	

FIG.11
 (PRIOR ART)

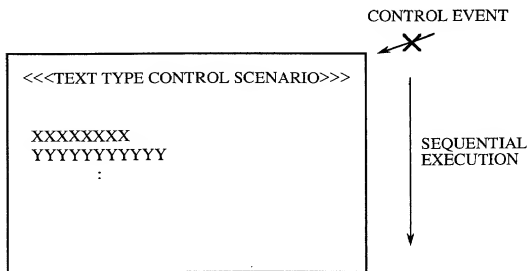

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

This declaration is of the following type:

- ☒ original ☐ design ☐ supplemental
☐ national stage of PCT
☐ divisional ☐ continuation ☐ continuation-in-part

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor (*if only one name is listed below*) or an original, first, and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"SCENARIO ANALYSIS TYPE CONTROL SYSTEM DEVICE"

the specification of which:

- ☒ is attached hereto.
☐ was filed on _____ as Application No. _____
and was amended on _____ (*if applicable*).
☐ was filed on _____ as PCT International Application No. PCT/_____
and was amended pursuant to PCT Article 19 on _____ (*if any*).

I state that I have reviewed and understand the contents of the specification identified above, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information that is material to the examination of the application identified above in accordance with 37 CFR §1.56.

I claim foreign priority benefits pursuant to 35 USC §119(a) or §119(d) of any foreign application(s) for patent or inventor's certificate or of any PCT international patent application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent, utility model, design registration, or inventor's certificate or any PCT international patent application(s) designating at least one country other than the United States of America filed by me on the same subject matter and having a filing date before that of the application(s) from which the benefit of priority is claimed.

PRIOR FOREIGN PATENT, UTILITY MODEL, AND DESIGN REGISTRATION APPLICATIONS					
COUNTRY	PRIOR FOREIGN APPLICATION	DATE OF FILING (day,month,year)	PRIORITY CLAIMED UNDER 35 USC §119(a) or §119(d)		
Japan	2000-263942	31/August/2000	x	YES	NO
				YES	NO
				YES	NO

I claim the benefit pursuant to 35 USC §119(e) of the following United States provisional patent application(s):

PRIOR U.S. PROVISIONAL PATENT APPLICATIONS, BENEFIT CLAIMED UNDER 35 USC §119(e)	
APPLICATION NO.	DATE OF FILING (day,month,year)

I claim the benefit pursuant to 35 USC §120 of any United States patent application(s) or PCT international patent application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this patent application is not disclosed in the prior patent application(s) in the manner provided by the first paragraph of 35 USC §112, I acknowledge the duty to disclose material information as defined in 37 CFR §1.56 effective between the filing date of the prior patent application(s) and the national or PCT international filing date of this patent application.

PRIOR U.S. PATENT APPLICATIONS OR PCT INTERNATIONAL PATENT APPLICATIONS DESIGNATING THE U.S., BENEFIT CLAIMED UNDER 35 USC §120					
U.S. PATENT APPLICATIONS			Status (check one)		
APPLICATION NO.	U.S. FILING DATE		PATENTED	PENDING	ABANDONED
1.					
2.					
3.					
PCT APPLICATIONS DESIGNATING THE U.S.			Status (check one)		
PCT APPLICATION NO.	PCT FILING DATE (day,month,year)	U.S. APPLICATION NOS. ASSIGNED (if any)	PATENTED	PENDING	ABANDONED
4.					
5.					
6.					

DETAILS OF FOREIGN APPLICATIONS FROM WHICH PRIORITY CLAIMED UNDER 35 USC §119 FOR ABOVE LISTED U.S./PCT APPLICATIONS				
ABOVE APPLN. NO.	COUNTRY	APPLICATION NO.	DATE OF FILING (day,month,year)	DATE OF ISSUE (day,month,year)
1.				
2.				
3.				
4.				
5.				
6.				

As a named inventor, I appoint the following registered practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: Customer Number 23548.



23548

PATENT TRADEMARK OFFICE

I further direct that correspondence concerning this application be directed to Customer Number 23548.



23548

PATENT TRADEMARK OFFICE

I declare that all statements made herein of my own knowledge are true, that all statements made on information and belief are believed to be true, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Takayuki MIMURA

Inventor's signature

Takayuki Mimura

Date: November 8, 2000

Country of Citizenship: Japan

Residence: Tokyo, Japan

Post Office Address:

c/o MITSUBISHI DENKI KABUSHIKI KAISHA,

2-3, Marunouchi 2-chome, Chiyoda-ku, Tokyo 100-8310 Japan

Full name of second joint inventor:

Inventor's signature

Date:

Country of Citizenship:

Residence:

Post Office Address: